


Morsetti volanti unipolari a 7, 11, 15 fori

Unipolar terminal blocks 7, 11, 15 holes

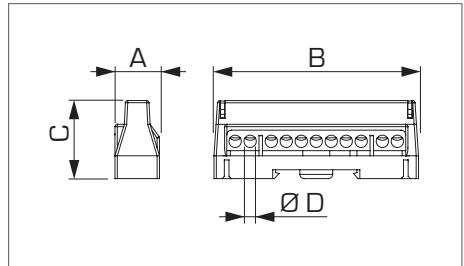

Articolo	Tensione Nominale	Grado di protezione	N. Fori	Conduttori connettabili Connectable cables			Dimensioni Dimensions			
				Sezione Section mm ²	Rigidi Rigid n.	Flessibili Flexible n.	A mm	B mm	C mm	Ø D mm
507F	750 V	IP00	7	16	1	-	19	59	34	N. 2x6 N. 5x5,3
				10	1	1				
				6	1	1				
				4	2-3	2				
				2,5	1-2	3				
5011F	750 V	IP00	11	16	1	-	19	88	34	N. 2x6 N. 9x5,3
				10	1	1				
				6	1	1				
				4	2-3	2				
				2,5	1-2	3				
5015F	750 V	IP00	15	16	1	-	19	114	34	N. 2x6 N. 13x5,3
				10	1	1				
				6	1	1				
				4	2-3	2				
				2,5	1-2	3				

Temperatura di esercizio Operating temperature	-5°C +85°C
Resistenza al calore Heat resistance	+130°C
Inserto Insert	Ottone Brass
Viti Screws	Acciaio Steel

Supporto isolante Insulating body	Policarbonato e Poliammide Polycarbonate and Polyamide
Autoestinguenza Self-extinguishing	850°C
Norme Standards	EN 60998-1:2004 EN 60998-2-1:2004
Direttive RoHS2 RoHS2 directive	2011/65/EU RoHS2