


Elettrovalvole in linea con controllo di flusso

Solenoid valves in line with flow control

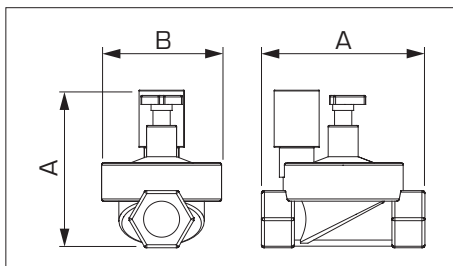

Articolo Item	Attacchi Attacks	Connessione Connection	Fili Weight	Tensione Voltage	Dimensioni Dimensions		
					A mm	B mm	D mm
EV034FF09V	3/4"	FF (female/female)	2	9 VAC	105	110	81
EV034FF12V	3/4"	FF (female/female)	2	12 VAC	105	110	81
EV034FF24V	3/4"	FF (female/female)	2	24 VAC	105	110	81
EV001FF09V	1"	FF (female/female)	2	9 VAC	112	110	81
EV001FF12V	1"	FF (female/female)	2	12 VAC	112	110	81
EV001FF24V	1"	FF (female/female)	2	24 VAC	112	110	81
EV112FF09V	1 1/2"	FF (female/female)	2	9 VAC	180	160	126
EV112FF12V	1 1/2"	FF (female/female)	2	12 VAC	180	160	126
EV112FF24V	1 1/2"	FF (female/female)	2	24 VAC	180	160	126
EV002FF09V	2"	FF (female/female)	2	9 VAC	190	170	126
EV002FF12V	2"	FF (female/female)	2	12 VAC	190	170	126
EV002FF24V	2"	FF (female/female)	2	24 VAC	190	170	126

Materiale corpo Body material	Nylon rinforzato Reinforced nylon
Materiale molla Spring material	Acciaio AISI 302 Steel AISI 302
Materiale diaframma Diaphragm material	PVC
Materiale viti Screws material	Acciaio AISI 304 Steel AISI 304

Funzione Function	2 WNC
Pressione di esercizio Operating pressure	0,3 - 10Kg/cm ²
Solenoido Solenoid	Gewa75 2WNC - Tutte le tensioni/All voltages
Direttive RoHS2 RoHS2 directive	2011/65/EU RoHS2