
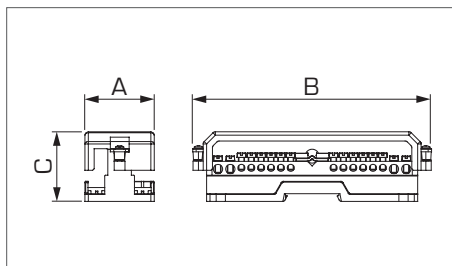


Morsettiere unipolari equipotenziali protette

Unipolar protected equipotential terminal block

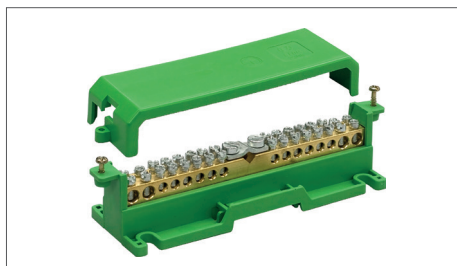

Articolo Item	Num. fori Holes number	Lato inserto ottone Brass insert side		Lato piastra rame Copper plate side		Dimensioni Dimensions		
		Numero e diametro fori Number and hole diameter		Tondino Rod	Treccia Wire	A mm	B mm	C mm
BT1317	16 + 1	12 x Ø 4,5 mm	4 x Ø 6 mm	Ø 6 - 8 mm	50 mm ²	45	155	46

Temperatura di esercizio Operating temperature	-5°C +85°C
Resistenza al calore Heat resistance	+130°C
Inserto Insert	Ottone Brass
Viti Screws	Acciaio Steel

Supporto isolante Insulating body	Poliammide Polyamide
Autoestinguenza Self-extinguishing	850°C
Norme Standards	EN 60947-7-1:2002
Direttive RoHS2 RoHS2 directive	2011/65/EU RoHS2