
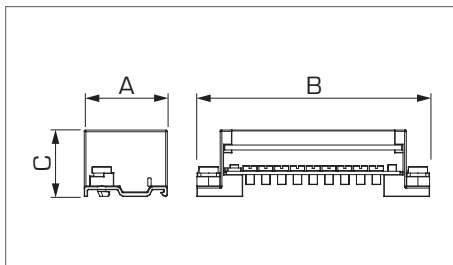


Morsettiere bipolari equipotenziali protette

Bipolar protected equipotential terminal block

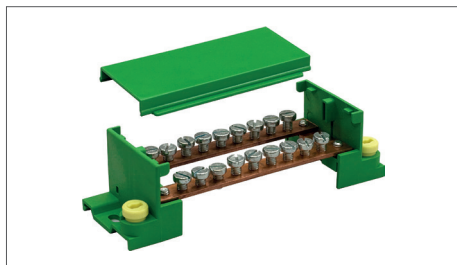

Articolo Item	Numero fori Holes number	Dimensioni barre Bar dimension			Dimensioni Dimensions			Spazio occupato Used Spaced
		Barre Bars	Dimensioni barre Flexible	Viti per barra Screws for bar	A mm	B mm	C mm	
PV122-18	18	2	12 x 2 mm	9 x M5	50	140	45	9
PV124-18	18	2	12 x 4 mm	9 x M5	50	140	45	9

Temperatura di esercizio Operating temperature	-5°C +85°C
Resistenza al calore Heat resistance	+130°C
Inserto Insert	Rame Copper
Viti Screws	Acciaio Steel

Supporto isolante Insulating body	Poliammide Polyamide
Autoestinguenza Self-extinguishing	850°C
Norme Standards	EN 60947-7-1:2002
Direttive RoHS2 RoHS2 directive	2011/65/EU RoHS2